


**MECHANICAL SOLUTIONS AND
ECOLOGICAL PRODUCTS**
FOR RODENT PROTECTION



RATDOWN


ANTI-RODENTS PRODUCTS

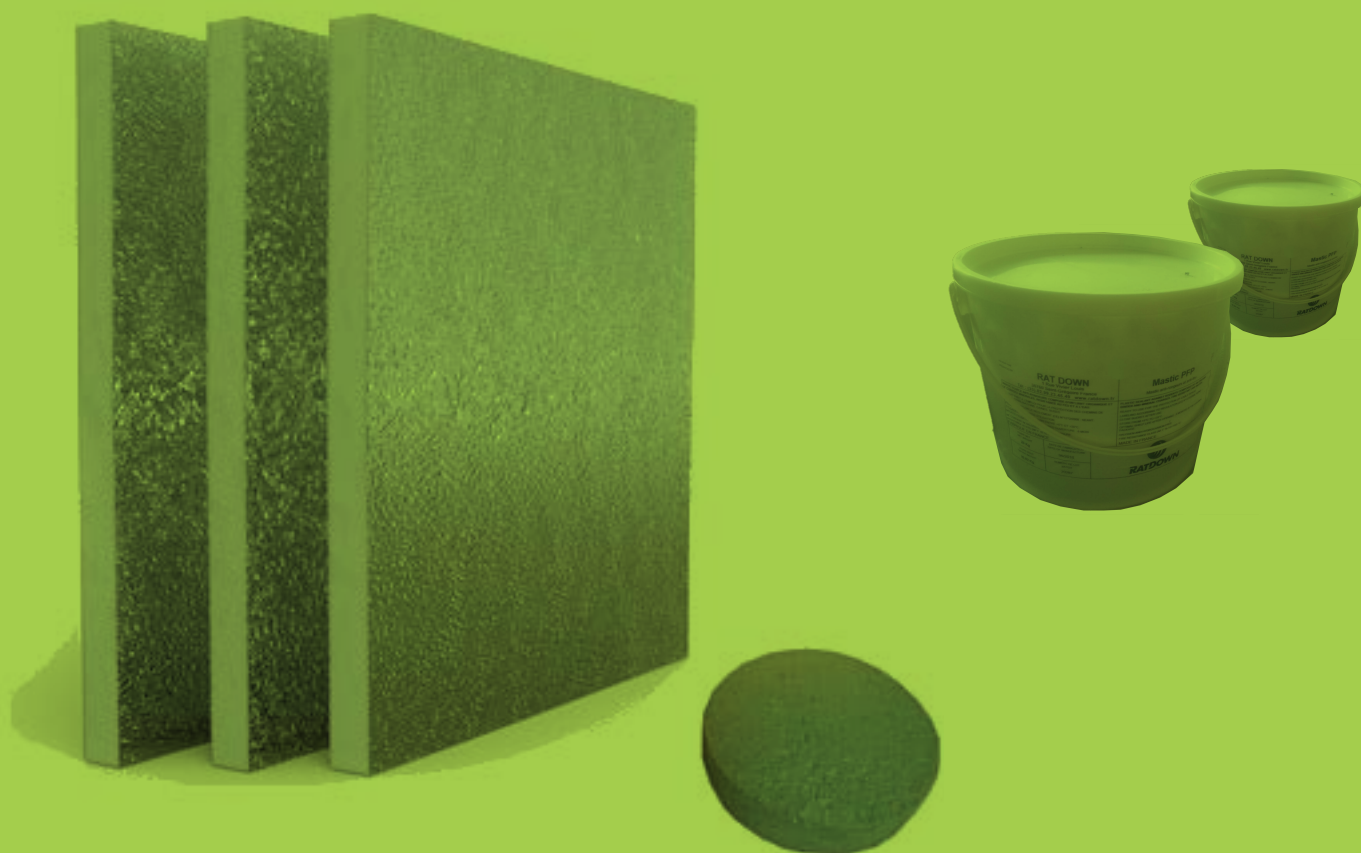

**Anti-rodents/
anti-fire Mastic
RAT DOWN PFP**

**Anti-rodents/
anti-fire Panel
RAT DOWN PFP**

**Attractive Glue
anti-rodents
GreenGlue**



Description

Principle	Flexible anti-rodents Mastic allowing the plugging of holes.	Polyurethane panel coated with RAT DOWN PFP Mastic.	Natural Glue anti-rodents
Use	Filling of holes, passages, electrical ducts, hopper, path of cables.		Product intended to be spread on all supports and material for the trapping of rodents.
General composition	On an aqueous basis, this Mastic is composed of an organic and inorganic fillers. Natural olfactory repellent based on Eucalyptus essential oil.		With colophane and banana essential oil

Données techniques

Properties and physico-chemical characteristics	<ul style="list-style-type: none"> - Non halogenated - Non corrosive and non toxic - Working temperatures: de -40 à 960°C 7.5<pH<8.2 - Density: 2.9 kg/dm3 		Natural product, non-corrosive and non-toxic.
Standards	Non-flammable, fire-resistant : <ul style="list-style-type: none"> o Standard NF P 92-507: Rating M1 o Standard NF F 16-101/102: Rating I2 		
Packaging	Bucket: 7kg and 20 kg	Round panel ø 20 cm Thickness 45 mm or rectangular Size 500 x 600 x 45 mm	Bucket: 3 or 7 kg.
